


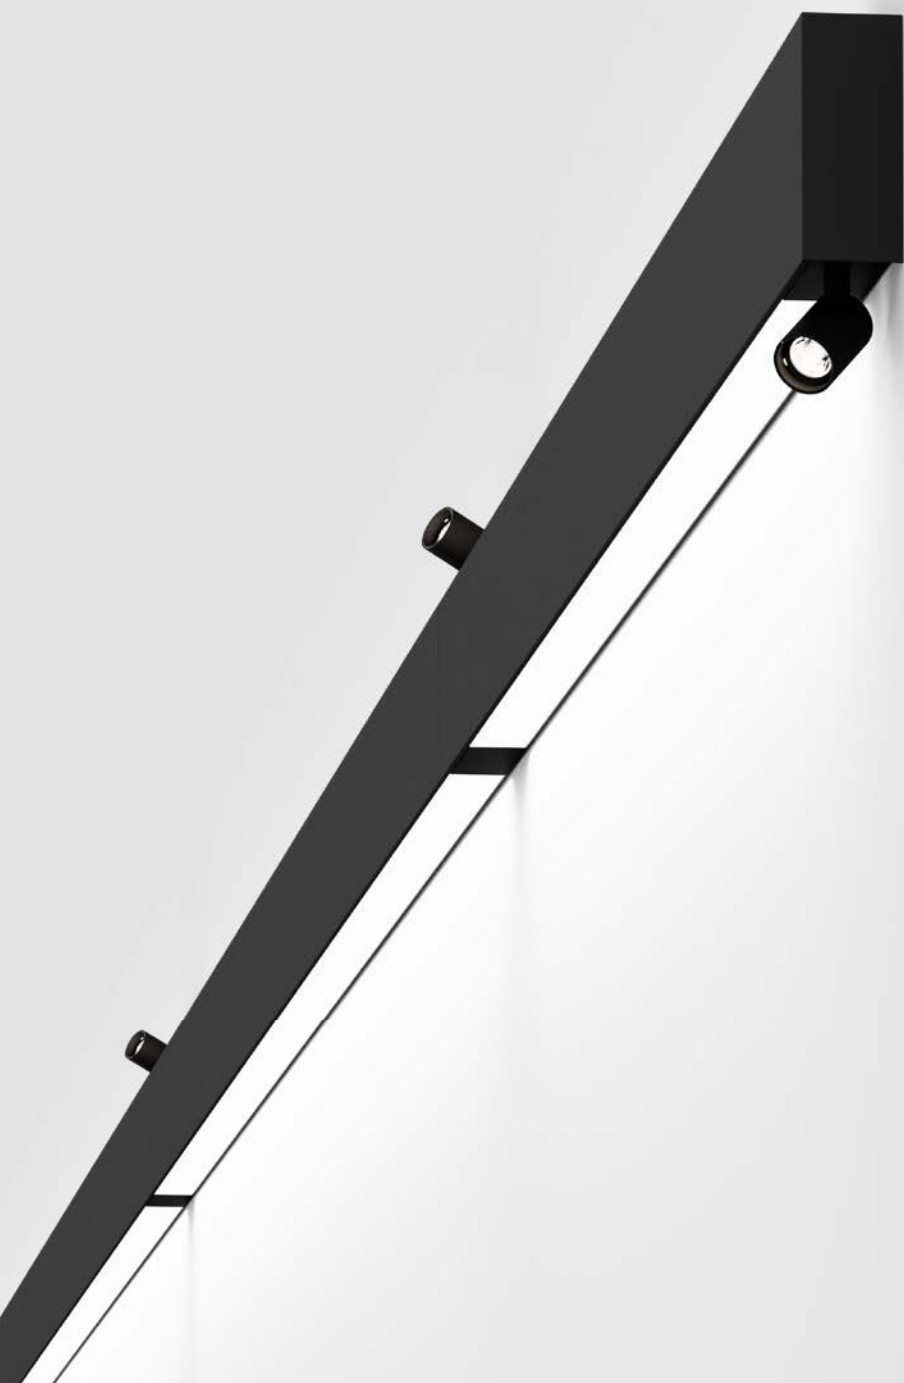

LINEA system

wall


EN Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; designed for continuous lighting systems, 90° angle connectors for flexible system design; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed

DE Leuchtenkörper und Frontabdeckung aus Aluminiumstrangpressprofil, kantige Ausführung; keine sichtbaren Schrauben; ausgelegt für durchgehende Lichtsysteme, 90° Winkelverbinder für flexiblen Systemaufbau; Oberfläche pulverbeschichtet; geeignet für Wandmontage; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige direkt/indirekte Lichtverteilung; HPO (High Performance Opal) Abdeckung für homogene Ausleuchtung; oder mit speziell berechneter, asymmetrischer Linse für homogene Beleuchtungsstärken (Montage wahlweise zur Boden- oder Deckenaufhellung); energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise JUST 26 Strahlereinsatz einsetzbar

Quickinfo

3000K, 4000K, TW
CRI ≥ 90, 3 SDCM
up to 117 m/W
L90 @ 50 000h
non DIM, DALI-2

Types

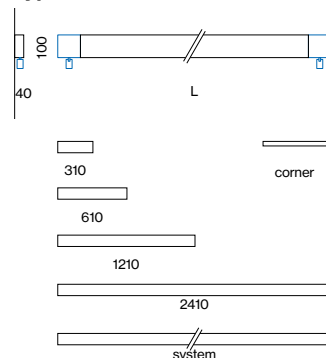

Colours




Light distributions



asym./ opal/ opal/
opal opal spot



single luminaire
(p. 634)



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6
tunable white 2700–5000 K*	D

*available from L 1210 mm | DALI-2 DT8

CONTROL

non DIM*	1
non DIM/ switch (only spotlights)	2
DALI-2*	3
DALI-2/ switch (only spotlights)	4

*not for variants with spotlights

MATERIAL COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8

SPOTLIGHT ALIGNMENT

left	B
right	C

spotlight(s) only with 3000 K

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K

MATERIAL COLOUR


special colours

LINEA system wall





↓ OPAL HIGH PERFORMANCE / ↑ OPAL HIGH PERFORMANCE

SYS. POWER	COLOUR TEMP.	LUMINOUS FLUX	L (mm)	ORDER CODE
14.7 W	3000 K	↓ 648 / ↑ 648 lm	310	058-61411:↓↑AH
	4000 K	↓ 715 / ↑ 715 lm		
29.3 W	3000 K	↓ 1300 / ↑ 1300 lm	610	058-61422:↓↑AH
	4000 K	↓ 1430 / ↑ 1430 lm		
59 W	3000 K	↓ 2590 / ↑ 2590 lm	1210	058-61444:↓↑AH
	4000 K	↓ 2860 / ↑ 2860 lm		
111 W	3000 K	↓ 5190 / ↑ 5190 lm	2410	058-61488:↓↑AH
	4000 K	↓ 5720 / ↑ 5720 lm		
29.3 W inner corner	3000 K	↓ 1300 / ↑ 1300 lm	633x633	058-61111:↓↑AH
29.3 W outer corner	4000 K	↓ 1430 / ↑ 1430 lm	633x633	058-61122:↓↑AH
	3000 K	↓ 1300 / ↑ 1300 lm		
	4000 K	↓ 1430 / ↑ 1430 lm		



↓ OPAL HIGH PERFORMANCE / ↑ ASYMMETRIC


SYS. POWER	COLOUR TEMP.	LUMINOUS FLUX	L (mm)	ORDER CODE
14.7 W	3000 K	↓ 648 / ↑ 821 lm	310	058-61411:↓↑AA
	4000 K	↓ 715 / ↑ 906 lm		
29.3 W	3000 K	↓ 1300 / ↑ 1640 lm	610	058-61422:↓↑AA
	4000 K	↓ 1430 / ↑ 1810 lm		
59 W	3000 K	↓ 2590 / ↑ 3280 lm	1210	058-61444:↓↑AA
	4000 K	↓ 2860 / ↑ 3620 lm		
111 W	3000 K	↓ 5190 / ↑ 6570 lm	2410	058-61488:↓↑AA
	4000 K	↓ 5720 / ↑ 7250 lm		
29.3 W inner corner	3000 K	↓ 1300 / ↑ 1300 lm	633x633	058-61111:↓↑AA
29.3 W outer corner	4000 K	↓ 1430 / ↑ 1430 lm	633x633	058-61122:↓↑AA
	3000 K	↓ 1300 / ↑ 1300 lm		
	4000 K	↓ 1430 / ↑ 1430 lm		




↑↓ OPAL HIGH PERFORMANCE / 1 SPOTLIGHT

SYS. POWER	COLOUR TEMP.	LUMINOUS FLUX	L (mm)	ORDER CODE
29.3 W	3000 K	↓ 1300 / ↑ 1300 lm	710	058-61422:↓↑▼H
	4000 K	↓ 1430 / ↑ 1430 lm		
59 W	3000 K	↓ 2590 / ↑ 2590 lm	1310	058-61444:↓↑▼H
	4000 K	↓ 2860 / ↑ 2860 lm		
111 W	3000 K	↓ 5190 / ↑ 5190 lm	2510	058-61488:↓↑▼H
	4000 K	↓ 5720 / ↑ 5720 lm		

spotlight alignment left or right



Light distributions

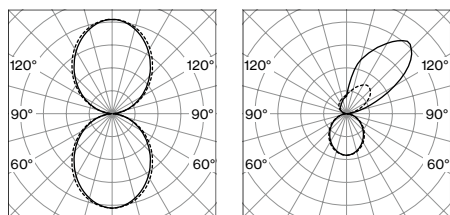

↓ opal high performance
↑ opal high performance

↓ opal high performance
↑ asymmetric

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, cover opal

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-254010

CONNECTOR

TYPE	ORDER CODE
linear connector (1 piece)	050-2551100
linear connector (10 pieces)	050-2551100.10

THROUGH WIRE

TYPE	ORDER CODE
3 × 1.5 mm ² (non DIM, 10 pieces)	004-90003
5 × 1.5 mm ² (DALI-2, 10 pieces)	004-90005

