



WEVER & DUCRÉ  
LIGHTING

# MIRBA 2.0

328284E3

Project

Type

Notes

Quantity

Date

## GENERAL

Wall

Surface

Jet Black + Opal PMMA

978<sup>a</sup> to 1676<sup>b</sup> lm/m

IP44

Interior

590<sup>a</sup> to 1014<sup>b</sup> lm

## LED

2700 K

CRI 90

L70 / 50000 h

3-step binning

## PHYSICAL

Length 609 mm

Width 60 mm

Height 40 mm

0.65 kg

## ELECTRICAL

incl. PS output selector | phase-cut dim

220 - 240 V

Total connected power 7<sup>a</sup> to 12<sup>b</sup> W


PC1

Safety distance 0.3 m


12<sup>a</sup> to 20<sup>b</sup> W/m

<sup>a</sup> Low Output


<sup>b</sup> High Output

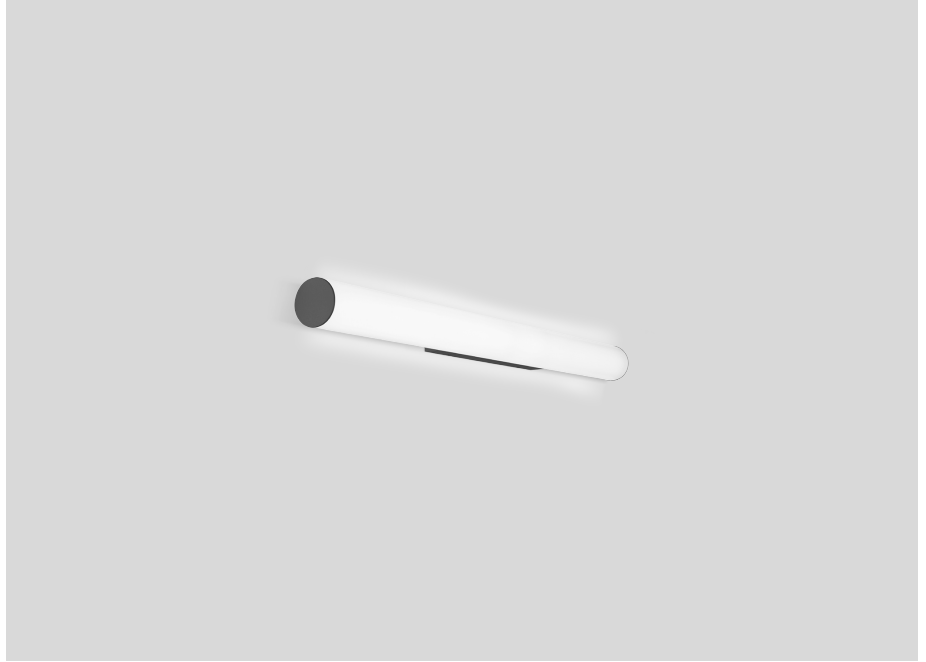

IP44  $\pm 0,3 \rightarrow D$



## LIGHT DISTRIBUTION

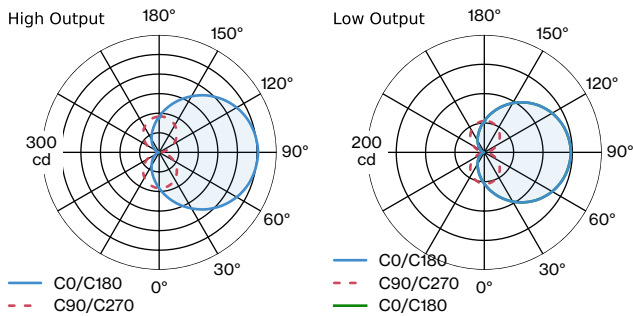



**WEVER & DUCRÉ**  
LIGHTING

# MIRBA 2.0

328284E3

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.94	0.89	0.83	0.78	0.73
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.