



WEVER & DUCRÉ
LIGHTING

DEEP bijou IP65 1.0

165361W3

GENERAL

Ceiling

Recessed

Signal White

IP65

Interior

365 lm

RAL 9003^a

LED

2700 K

CRI 90

3-step binning

OPTICAL

Flood

Beam angle 30°

PHYSICAL

Diameter 56 mm

Height 55 mm

0.093 kg

wire springs

ELECTRICAL

excl. power supply

9 V

Total connected power 6 W

LED Inset 4.5 W

500 mA

PC3

Safety distance 0.3 m

CUTOUT

Diameter 50-52 mm


Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 85 mm

^a RAL Palette colors may deviate slightly due to production conditions.

LIGHT DISTRIBUTION




Project

Type


Notes

Quantity

Date

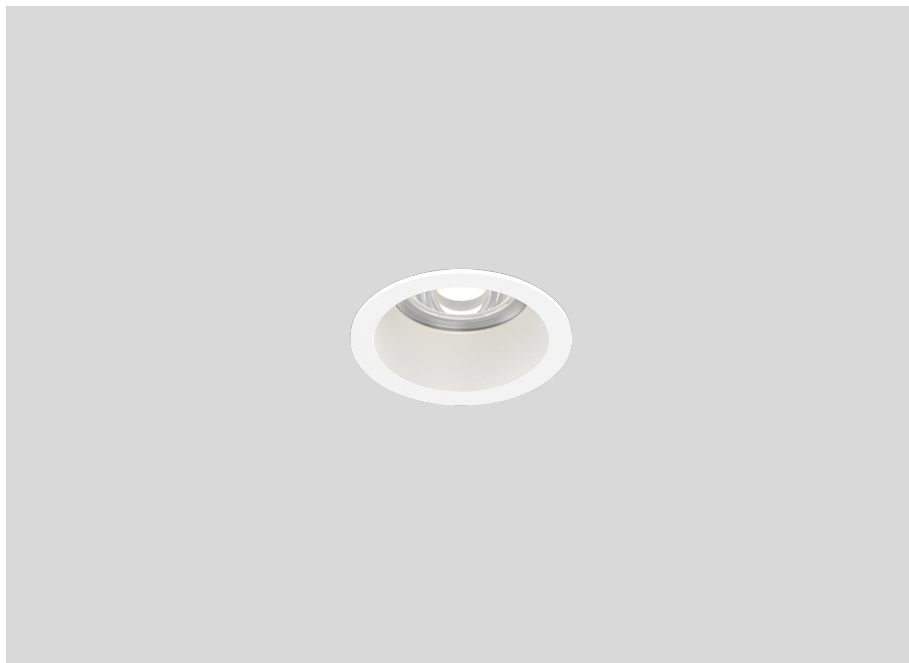

Round ceiling recessed downlight made from die-cast aluminium; surface Signal White; powder coated; matt texture; RAL 9003; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 85 mm; beam angle 30°; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; Binning initial 3 MacAdam; CRI 90; UGR 16; degree of protection IP65; PC3; IC rated; power supply not included; light source not replaceable;





WEVER & DUCRÉ
LIGHTING

DEEP bijou IP65 1.0

165361W3

CONE DIAGRAM

flood 30°

h (m)	EO° (lx)	ø (m)
1	1058	0.54
2	265	1.07
3	118	1.61
4	66	2.15
5	42	2.68

Electrical

Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 7W 500mA 5-14,5V IP67	57·41·24	9 0 2 1 4 3 0 1
Driver 7W 500mA 7-13V	122·41·23	9 0 2 2 4 3 0 1