

Description

EN Supporting profile in extruded aluminium; end cap in aluminium, no visible screws; surface white powder coated; suitable for wall or ceiling mounting (TUBO 100 surface); surface mounted or suspended luminaire with 1500 mm cable suspension; height adjustment without tools; spring clip attachment to the luminaire; freely positionable; incl. transparent feed; luminaire profile for mounting available in advance; remaining luminaire components mounted without tools; light inset consisting of highly reflective coated extruded profile for improved thermal management; cylindrical cover made of satinised PMMA for homogeneous illumination; with 340° light emission and light ceiling illumination; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colours 3000 K and 4000 K; CRI ≥ 80 ; min. 90 % of the luminous flux after 50 000 hours; degree of protection IP 20; PC I; photobiological safety according to IEC 62471 risk group 0; optionally non-dimmable or DALI-2 control

DE Tragprofil aus Aluminiumstrangpressprofil; Enddeckel aus Aluminium, keine sichtbaren Schrauben; Oberfläche weiß pulverbeschichtet; geeignet für Wand- oder Deckenmontage (TUBO 100 surface); Anbau- bzw. Pendelleuchte mit 1500 mm Seilabhngung; werkzeuglose Hhnenverstellung; Befestigung an der Leuchte mittels Federclips; frei positionierbar; inkl. transparenter Einspeiseleitung; Leuchtenprofil fr Montage vorab lieferbar; restliche Leuchtenkomponenten werkzeuglos montierbar; Lichteinsatz bestehend aus hochreflektierend lackiertem Strangpressprofil fr verbessertes Thermomanagement; zylindrische Abdeckung aus satiniertem PMMA fr homogene Ausleuchtung; mit 340° Lichtabstrahlung und leichter Deckenaufhellung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Binning initial ≤ 3 MacAdam; lieferbar in den Lichtfarben 3000 K und 4000 K; CRI ≥ 80 ; min. 90 % des Lichtstromes nach 50 000 h Lebensdauer; Schutzart IP 20; SK I; photobiologische Sicherheit gem IEC 62471 Risikogruppe 0; wahlweise nicht dimmbar oder DALI-2 Steuerung


TUBO 100

surface/suspended

Quickinfo

3000 K, 4000 K
CRI ≥ 80
L90 @ 50 000 h
up to 10100 lm
non DIM, DALI-2
opal cover

Types

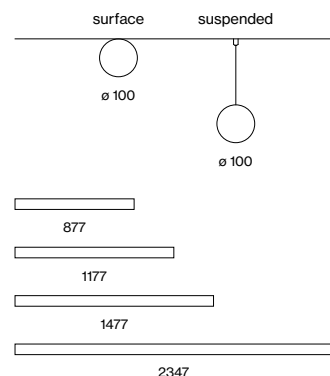

Colour



Light distribution



direct direct

Order options

COLOUR TEMPERATURE	
3000K	5
4000K	6

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR
white



LIGHT OPTIC COVER
opal




TUBO 100 surface





LUMINAIRE

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
27 W	3000 K	3580 lm	877	0 5 8 - 1 1 3 3 : 7 0
	4000 K	3790 lm		
37 W	3000 K	4770 lm	1177	0 5 8 - 1 1 3 4 : 7 0
	4000 K	5050 lm		
46 W	3000 K	5960 lm	1477	0 5 8 - 1 1 3 5 : 7 0
	4000 K	6310 lm		
73 W	3000 K	9540 lm	2347	0 5 8 - 1 1 3 8 : 7 0
	4000 K	10100 lm		

LIGHT DISTRIBUTION



direct




TUBO 100 suspended



LUMINAIRE

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
27 W	3000 K	3580 lm	877	0 5 8 - 1 2 3 3 : 7 0
	4000 K	3790 lm		
37 W	3000 K	4770 lm	1177	0 5 8 - 1 2 3 4 : 7 0
	4000 K	5050 lm		
46 W	3000 K	5960 lm	1477	0 5 8 - 1 2 3 5 : 7 0
	4000 K	6310 lm		
73 W	3000 K	9540 lm	2347	0 5 8 - 1 2 3 8 : 7 0
	4000 K	10100 lm		

LIGHT DISTRIBUTION



direct