



VELA

suspended


EN Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated; suspended; with integrated tool-less suspension height adjustment; incl. transparent feed or with height adjustable rod suspension (chrome), feed in rod; highly reflective coating for improved efficiency; completely homogeneously illuminated, satinised PMMA cover; up to ø600 mm: microprismatic PMMA cover; either with direct or direct / indirect light distribution; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring

DE Runder Leuchtenkörper aus Aluminium, gerolltes Profil, nahtlos verschweißt; Oberfläche pulverbeschichtet; abgependelt; werkzeuglose Höhenverstellung an der Leuchte; inkl. transparenter Einspeiseleitung oder mit kürzbarer Pendelrohrabhängung (chrom), Einspeiseleitung in Pendelrohr; hochreflektierende Beschichtung für verbesserten Wirkungsgrad; absolut homogen ausgeleuchtete, satinierte PMMA-Abdeckung; bis ø600 mm: mikroprismatische PMMA-Abdeckung; wahlweise mit direkter bzw. direkt / indirekter Abstrahlcharakteristik; Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin mit 2 Kabelöffnungen und Steckklemme für Weiterverdrahtung

Quickinfo

3000 K, 4000 K
CRI ≥ 80, 3 SDCM
L90 @ 50 000 h
UGR ≤ 19 / 65° ≤ 3000 cd/m²
up to 153 lm/W
non DIM, DALI-2, DALI-2/CLO
opal, microprismatic (UGR ≤ 19)


Types



Colours




Light distributions




DIN EN 12464-1
UGR ≤ 19



direct/indirect
illumination



tunable white
on request



XPECTRUM
on request

Order options

SUSPENSION

cable 1500 mm	2
rod 1000 mm	4

COLOUR TEMPERATURE

3000 K	5
4000 K	6

CONTROL

non DIM	1
DALI-2*	D
DALI-2/CLO	3

*available for luminaires ≤ 42 W

MATERIAL COLOUR

○ pure white RAL 9010	7
● white aluminium RAL 9006	G
● jet black RAL 9005	8
● gold dust RAL 260-M	9
● special colours* p.335	X

*canopy always in white

LIGHT OPTIC COVER

opal	O
microprismatic (UGR ≤ 19)	K

Options on request

COLOUR RENDERING INDEX

CRI ≥ 90
CRI ≥ 98 XPECTRUM

SUSPENSION


rod 2000 mm

COLOUR TEMPERATURE

tunable white 2700–6500 K (2 DALI)

EMERGENCY LIGHT

1h accupack
3h accupack

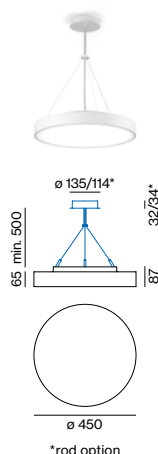

VELA 450 suspended



DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
16.7 W	3000 K	2050 lm	0 7 3 - 1 4 1 :: ◆ □
	4000 K	2170 lm	
30 W	3000 K	3420 lm	0 7 3 - 1 4 2 :: ◆ □ O
	4000 K	3620 lm	


luminous flux opal



DIRECT / INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
21.1 W	3000 K	↓ 1960 / ↑ 767 lm	0 7 3 - 1 4 4 :: ◆ □
	4000 K	↓ 2070 / ↑ 812 lm	
35 W	3000 K	↓ 3070 / ↑ 1200 lm	0 7 3 - 1 4 5 :: ◆ □ O
	4000 K	↓ 3250 / ↑ 1270 lm	

luminous flux opal

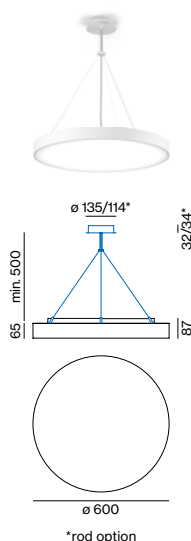

VELA 600 suspended



DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
31 W	3000 K	4020 lm	0 7 3 - 1 5 1 :: ◆ □
	4000 K	4250 lm	
42 W	3000 K	5290 lm	0 7 3 - 1 5 0 :: D ◆ O
	4000 K	5600 lm	
48 W	3000 K	5940 lm	0 7 3 - 1 5 2 :: ◆ □ O
	4000 K	6290 lm	

luminous flux opal





DIRECT / INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
45 W	3000 K	↓ 4110 / ↑ 1860 lm	0 7 3 - 1 5 4 :: ◆ □
	4000 K	↓ 4350 / ↑ 1970 lm	
68 W	3000 K	↓ 5940 / ↑ 2690 lm	0 7 3 - 1 5 5 :: ◆ □ O
	4000 K	↓ 6290 / ↑ 2850 lm	

luminous flux opal

Light distributions

opal
direct/indirect powermicroprismatic
direct/indirect power

Order options

SUSPENSION

cable 1500mm

COLOUR TEMPERATURE

3000 K	5
4000 K	6

CONTROL

non DIM	1
DALI-2/CLO	3

MATERIAL COLOUR

○ pure white RAL 9010	7
● white aluminium RAL 9006	G
● jet black RAL 9005	8
● gold dust RAL 260-M	9
● special colours* ● p.335	X

*canopy always in white

LIGHT OPTIC COVER

opal

Options on request

COLOUR RENDERING INDEX

CRI ≥ 90

CRI ≥ 98 XPECTRUM

SUSPENSION

rod 2000mm


COLOUR TEMPERATURE

tunable white 2700–6500 K (2 DALI)

EMERGENCY LIGHT

1h accupack

3h accupack

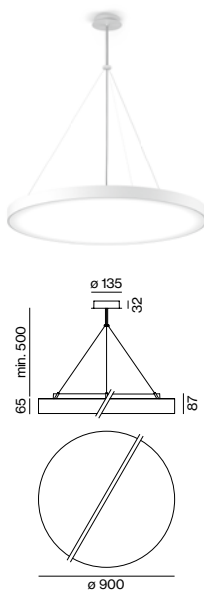

VELA 900 suspended



UGR
≤ 19

cd/m²
≤ 3000

RG0
IEC 62471

DALI
1ADDR.

220-240V

IP40

X-PERT

X-PERT

DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
45 W	3000 K	6510 lm	0 7 3 - 1 2 7 0 :: 1 ☒ ○
	4000 K	6890 lm	
71 W	3000 K	9800 lm	0 7 3 - 1 2 7 1 :: ☒ ☒ ○
	4000 K	10400 lm	



UGR
≤ 19

cd/m²
≤ 3000

RG0
IEC 62471

DALI
1ADDR.

220-240V

IP40


X-PERT

X-PERT

DIRECT/INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
60 W	3000 K	↓ 6510 / ↑ 2300 lm	0 7 3 - 1 2 7 3 :: 1 ☒ ○
	4000 K	↓ 6890 / ↑ 2430 lm	
96 W	3000 K	↓ 9800 / ↑ 4410 lm	0 7 3 - 1 2 7 4 :: ☒ ☒ ○
	4000 K	↓ 10400 / ↑ 4670 lm	

Light distribution



opal

direct/indirect power

Rev. 006/2021-12

Order options

SUSPENSION
cable 1500mm

COLOUR TEMPERATURE
3000K 5
4000K 6

CONTROL
non DIM 1
DALI-2/CLO 3

MATERIAL COLOUR
pure white RAL 9010 7
white aluminium RAL 9006 G
jet black RAL 9005 8
gold dust RAL 260-M 9
special colours* p.335 X
*canopy always in white

LIGHT OPTIC COVER
opal


Options on request

COLOUR RENDERING INDEX
CRI ≥ 90
CRI ≥ 98 XPECTRUM

SUSPENSION
rod 2000mm

COLOUR TEMPERATURE
tunable white 2700–6500K (2 DALI)

LIGHT OPTIC COVER
microprismatic

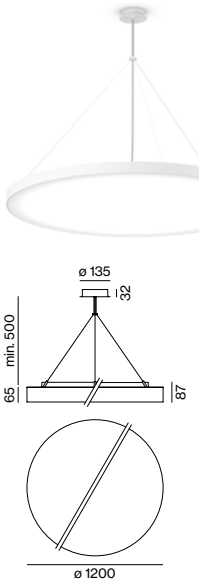

VELA 1200 suspended



DIRECT


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
79 W	3000 K	10520 lm	0 7 3 - 1 2 8 0 :: 1 □ O
	4000 K	11140 lm	
147 W	3000 K	19430 lm	0 7 3 - 1 2 8 1 :: □ □ O
	4000 K	20570 lm	



DIRECT / INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
100 W	3000 K	↓ 11400 / ↑ 4220 lm	0 7 3 - 1 2 8 3 :: 1 □ O
	4000 K	↓ 12000 / ↑ 4470 lm	
180 W	3000 K	↓ 21000 / ↑ 5730 lm	0 7 3 - 1 2 8 4 :: □ □ O
	4000 K	↓ 22200 / ↑ 6060 lm	

Light distribution



opal
direct / indirect power