




Quickinfo

3000 K, 4000 K
 CRI ≥ 90
 L80 / 50 000 h
 up to 3690 lm
 non DIM, DALI-2

Types



Colours



Light distributions



Description

EN Track light made of die-cast aluminium; surface powder coated in white, grey or black; 355° rotatable and 90° tiltable; integrated converter in the plastic adapter; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colours 3000 K and 4000 K; CRI ≥ 90; min. 80 % of the luminous flux after 50 000 hours; high quality reflector with spherical facet finish; precise radiation characteristic with three different beam angles; installed and exchanged without tools; optical attachments available as accessories; optical attachments can be combined; degree of protection IP20; PC II; adapter for toolless insertion or movement on a variety of 3-phase power tracks; optionally non-dimmable or DALI-2 control

DE Stromschienenstrahler aus Aluminiumdruckguss; Oberfläche weiß, grau oder schwarz pulverbeschichtet; 355° dreh- und 90° schwenkbar; Konverter im Kunststoffadapter integriert; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Bildung von Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Binning initial ≤ 3 MacAdam; lieferbar in den Lichtfarben 3000 K und 4000 K; CRI ≥ 90; min. 80 % des Lichtstromes nach 50 000 h Lebensdauer; hochwertiger Reflektor mit sphärischer Facetenoptik; präzise Abstrahlcharakteristik mit drei verschiedenen Ausstrahlwinkeln; werkzeuglos einsetz- bzw. austauschbar; optische Aufsätze sind als Zubehör erhältlich; optische Aufsätze miteinander kombinierbar; Schutzart IP20; SK II; Adapter für werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3-Phasen Stromschienen; wahlweise nicht dimmbar oder DALI-2 Steuerung

VARO 80 S

track

Order options

COLOUR TEMPERATURE	
3000K	0
4000K	1

CONTROL	
non DIM	1
DALI-2*	3

*works only with TRACK STUCCHI/
GLOBAL PULSE


MATERIAL COLOUR	
white	7
grey	6
black	8




BEAM ANGLE	
spot 17°	S
medium 28°	M
flood 38°	F

Options on request

COLOUR RENDERING INDEX
CRI ≥ 80



VARO 80 S track



TRACK LIGHT

SYS. POWER	TRACK	COLOUR TEMP.	LUM. FLUX	ORDER CODE
29W	Stucchi	3000K	2560lm	180-6420
		4000K	2750lm	
45W	Stucchi	3000K	3430lm	180-6421
		4000K	3690lm	

luminous flux medium 28°


LIGHT DISTRIBUTION 45W, 4000K

spot 17°			medium 28°			flood 38°		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	27400	0.30	1	13000	0.49	1	8220	0.68
2	6840	0.60	2	3240	0.99	2	2060	1.37
3	3040	0.90	3	1440	1.48	3	913	2.05
4	1710	1.19	4	810	1.97	4	514	2.73
5	1090	1.49	5	519	2.46	5	329	3.42

Optical accessories



LENSES AND HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
linear prismatic lens	75-9	080-6402110P
flood lens clear	75-9	080-6402110F
honeycomb louver	75-9	080-6401118



SNOOT

TYPE	Ø-H (mm)	ORDER CODE
short	66-23	080-6403118
medium	66-38	080-6403218
angle	66-38	080-6403318

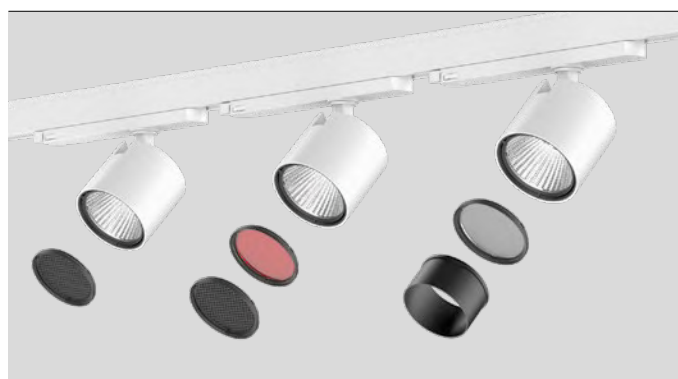

possibility to combine different optical accessories (max. 2 pieces)