

ZE·R

ZETR 13-O-USB + 13-O-X

SPECIFICATIONS

13_series Double Outlet USB + Faceplate

COMPONENTS

13-O-B
13-O-T
13-OF-U or 13-O-U-X

SPECIFICATIONS

Surface Finish: Matte Black or Matte White as standard plus optional decorative metal cover

Outlet Depth: 32 mm

Outlet Body Height: 42 mm

Outlet Width: 129 mm

Embedding Depth: 32 mm (Including faceplate)

Outlet Faceplate Height: 46 mm

Outlet Faceplate Width: 132 mm

Material: PC (polycarbonate) for skin

Outlet Standard: Australian/New Zealand

Product Certifications: RCM Registered Australia/ New Zealand

Standards: AS/NZS 3112, AS/NZS 3100, AS/NZS 60950

Rated Current: 10 A, 250 V, AC, 50 Hz

USB Ports: 2.1A suitable for smart phones and high power tablets.

USB Output: 2 × 5 V d.c.; 2.1A (Total)

Auto switch: ZETR outlets contain an auto switching mechanism which is engaged when the plug pins are inserted.

Safety: Safety shutters included preventing insertion of foreign objects into the socket apertures.

Patent: International Patent Pending

Area: Interior

IP: 20

MOUNTING

To be mounted within the surface to achieve flush finish in conjunction with one of the below ZETR mounting assemblies:

Fixed Mounting Assembly (FMA) for plasterboard installation (53mm deep but can be altered in depth).

Adjustable Mounting Assembly (AMA) for all other installations such as stone, tile, timber and rendered walls (56mm deep).

INSTALLATION

All ZETR products are to be installed with care by a licensed electrician and skilled tradesman.

Product installation must comply with Australian and New Zealand standards AS/NZS 3000.

It is the installers responsibility to ensure correct and safe installation.

CLEANING & MAINTENANCE


Surface cleaning with cloth: Hospital-grade water-based cleaners only. Do not use any solvent based cleaner such as acetone, tar-remover or trichloroethylene.

ZETR 13-O-USB + 13-O-X

OVERALL DIMENSIONS

ZETR Pty Ltd
PO Box 1214, Newport NSW, Australia 2106
Phone: +61 2 9446 7796
Email: contact@zetr.com.au
www.zetr.com.au

13_series Double Outlet USB + Faceplate

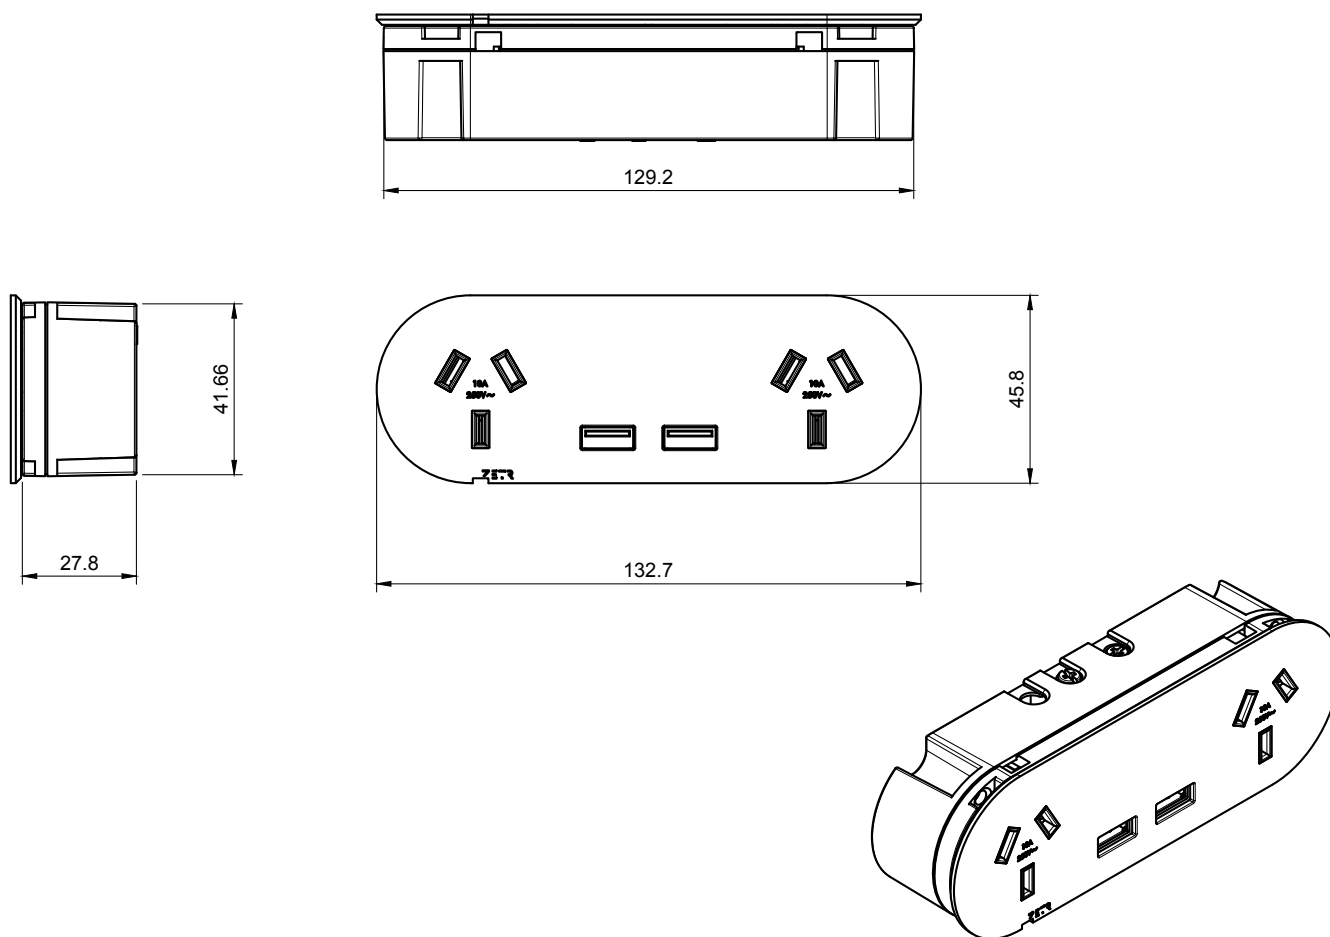


ZETR 13-O-USB + 13-O-X


MOUNTING POINTS, SAFETY SHUTTERS AND AUTO SWITCHING

ZETR Pty Ltd
PO Box 1214, Newport NSW, Australia 2106
Phone: +61 2 9446 7796
Email: contact@zetr.com.au
www.zetr.com.au

OUTLET BODY

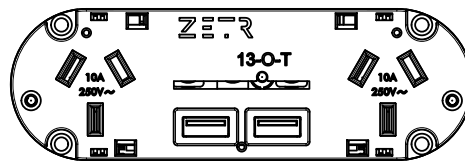

SAFETY SHUTTERS

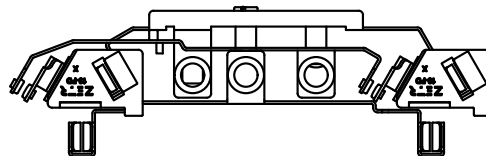

AUTO SWITCHING

